



Spé Lapacho

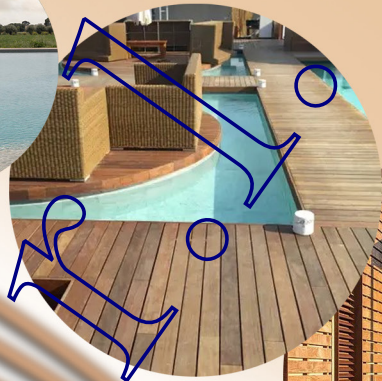

Stemau



Wood Flooring Production



Wood species: IPÉ LAPACHO



Wood Flooring Production

Stemau S.r.l.

Legal Head Office and Showroom Via Pieve Ligure, 15 00168 Rome

Warehouse and Showroom Via Refrancore, 26 00166 Rome

Factory Via Morsasco, 41 00166 Rome

Phone 0039.06.45.50.22.60 - info@stemausr.it - www.stemausr.it

VAT 01814361000 - Fiscal Code 07578980588

INFORMATION SHEET In compliance with the provisions of the law Legislative Decree no. 104/2005 "Regulations for consumer information"

EUROPEAN STANDARDS: UNI EN 11538

COMMERCIAL NAME: IPE'

BOTANICAL NAME: TABEBUIA IPE'

FAMILY: BIGNONIACEAE

ORIGIN: CENTRAL AND SOUTH AMERICA

OXIDATION: LOW

HARDNESS: HIGH

DENSITY: FRESH 1150-1250 Kg/m³ - DRY 850-950 Kg/m³

DRYING: EASY AND WITHOUT DIFFICULTY, EVEN IF IT HAS A TENDENCY TO EMBARK

GROWTH AREA: COLOMBIA, VENEZUELA, BRAZIL, BOLIVIA

COLOUR: INTENSE BROWN, REDDISH, OLIVE GREEN, WITH LIGHT AND DARK VEINS

PROPERTY: WOOD SUITABLE FOR OUTDOOR FLOORING, RESISTANT TO WATER, MOLD AND BACTERIA

IPÉ LAPACHO





Technical specifications of IPÉ LAPACHO for outdoor Decking Parquet

ESSENTIAL FEATURES	PERFORMANCE	TECHNICAL SPECIFICATION HARMONIZED
Density kg/m ³	850-850	
Reaction to fire	Dfl-S1	UNI EN 14342-2013 EN 13501-1
Thermal conductivity W/Mk	0,19	UNI EN 14342-2013

QUICK INSTALLATION GUIDE

Installation on aluminum or wooden joists with visible screws for profile **WITHOUT** symmetrical F/F lateral milling or with concealed clips for profile **WITH** symmetrical F/F lateral milling.
(For installation, in case of slopes, it is necessary to use jacks with adjustable support).

