


Merbau
Merbau



Stemau S.p.A.



Wood Flooring Production



Wood species: MERBAU



Wood Flooring Production

Stemau S.r.l.

Legal Head Office and Showroom Via Pieve Ligure, 15 00168 Rome

Warehouse and Showroom Via Refrancore, 26 00166 Rome

Factory Via Morsasco, 41 00166 Rome

Phone 0039.06.45.50.22.60 - info@stemausr.it - www.stemausr.it

VAT 01814361000 - Fiscal Code 07578980588

SCHEDA INFORMATIVA In ottemperanza alle disposizioni di legge D.Lgs. n. 206/2005 "Norme per l'informazione del consumatore"

EUROPEAN STANDARDS: UNI EN 13226 - UNEN 13227 - UNI EN 13489

COMMERCIAL NAME: MERBAU

BOTANICAL NAME: INTSIA BIJUGA

FAMILY: CAESALPINIACEAE

ORIGIN: SOUTH EAST ASIA, EAST AFRICA, AUSTRALIA

OXIDATION: LOW

HARDNESS: MEDIUM

DENSITY: 770-850 Kg/m³


DRYING: LOW SHRINKAGE

GROWTH AREA: BURMA, THAILAND, LAOS, VIETNAM, CAMBODIA, NEW GUINEA, MADAGASCAR, PACIFIC ISLANDS, AUSTRALIA

COLOUR: LIGHT YELLOW SAPWOOD, REDDISH-COPPER-BROWN HEARTWOOD

PROPERTY: WOOD VERY RESISTANT TO TRAMPLING

MERBAU SELECT

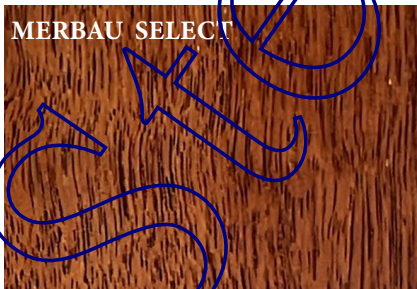

SELECT ● UNIFORM TONES, HOMOGENEOUS VEININGS, RANDOM SMALL KNOTS

Technical specifications of MERBAU Solid Wood Parquet



ESSENTIAL FEATURES	PERFORMANCE	TECHNICAL SPECIFICATION HARMONIZED
Density kg/m ³	770-850	
Reaction to fire	Dfl-S1	UNI EN 14342-2013 EN 13501-1
Thermal conductivity W/Mk	0,17	UNI EN 14342-2013

QUICK INSTALLATION GUIDE

Laying with glue or nailed (only for planks from thickness of 20 mm and above).

It is recommend using solvent-free glues to avoid stains on the surface.

Installation on underfloor heating: suitable (if the conditions of the system allow for it and comply with the regulations).



Technical specifications of MERBAU 2 or 3 Layers Pre-finished Parquet

ESSENTIAL FEATURES	PERFORMANCE	TECHNICAL SPECIFICATION HARMONIZED
Density kg/m ³	770-850	
Nominal upper layer thickness mm	3/4	
Reaction to fire	Dfl-S1	UNI EN 14342-2013 EN 13501-1
Thermal conductivity W/Mk	0,17	UNI EN 14342-2013

QUICK INSTALLATION GUIDE

2 Layers Laying: with glue or floating (only for planks from width of 120 mm and above).

3 Layers Laying: Floating

It is recommend using solvent-free glues to avoid stains on the surface.

For floating laying, it is recommend using a shock-absorbing or insulating mat.

Installation on underfloor heating: suitable (if the conditions of the system allow for it and comply with the regulations).

