


Sapele Sapele



Stemau S.p.A.

MS
Stemau
Wood Flooring Production

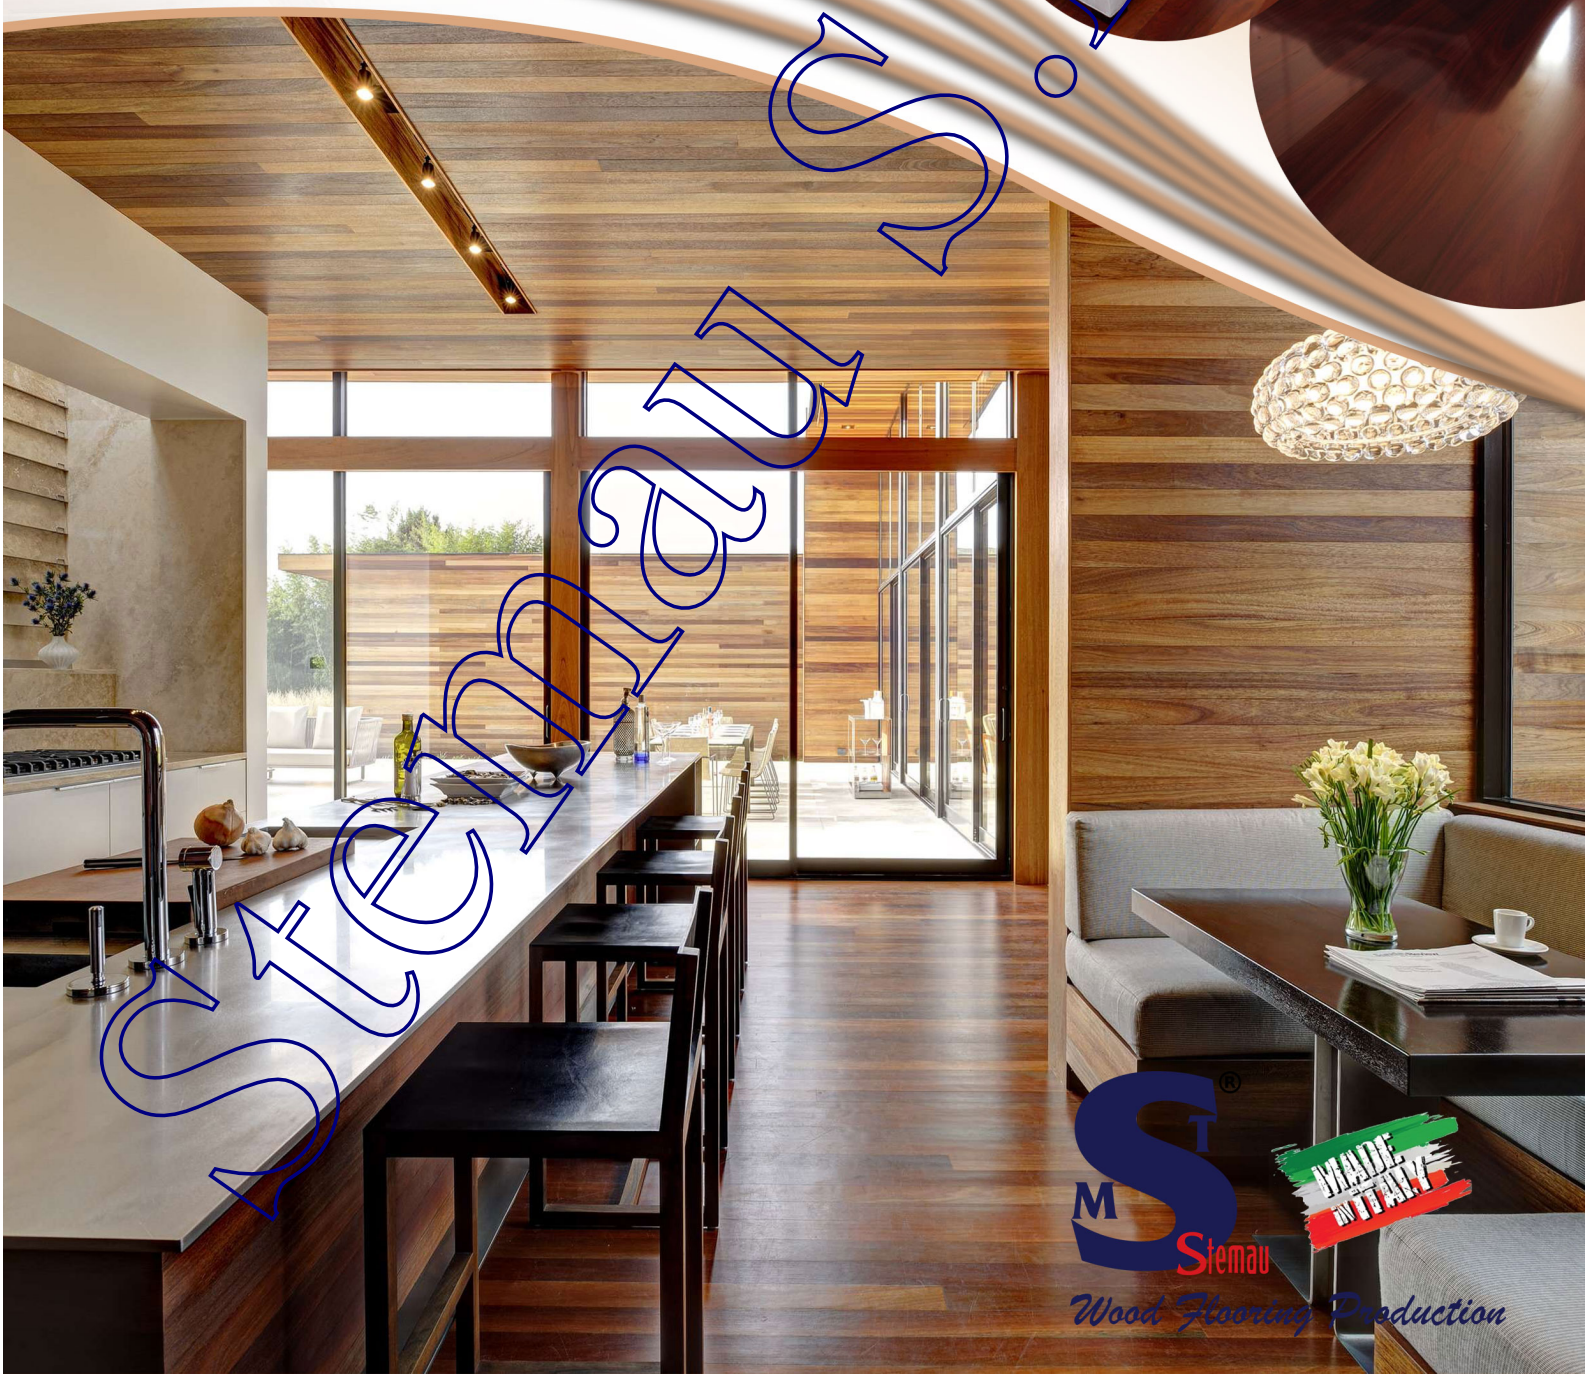



Wood species: SAPELE



Stemau S.r.l.
Legal Head Office and Showroom Via Pieve Ligure, 15 00168 Rome
Warehouse and Showroom Via Refrancore, 26 00166 Rome
Factory Via Morsasco, 41 00166 Rome
Phone 0039.06.45.50.22.60 - info@stemausr.it - www.stemausr.it
VAT 01814361000 - Fiscal Code 07578980588

INFORMATION SHEET In compliance with the provisions of the law Legislative Decree no. 104/2005 "Regulations for consumer information"

EUROPEAN STANDARDS: UNI EN 13227
COMMERCIAL NAME: SAPELE
BOTANICAL NAME: ENTANDROPHRAGMA CYLINDRICUM
FAMILY: MELIACEAE
ORIGIN: AFRICA
OXIDATION: HIGH
HARDNESS: MEDIUM
DENSITY: FRESH 900 Kg/m³ - DRY 650 Kg/m³
DRYING: SLOW AND CAREFUL TO AVOID DEFORMATIONS
AREA: WEST AND CENTRAL AFRICA
COLOUR: REDDISH-RED-BROWN
PROPERTY: STRONG AND DURABLE WOOD

SELECT
SAPELE

SELECT  **UNIFORM TONES, HOMOGENEOUS VEININGS, RANDOM SMALL KNOTS**
NATURE  **SLIGHT CHROMATIC SHADES, ACCENTUATED VEININGS, CONTAINED KNOTS**
RUSTIC  **MARKED TONE CHANGES, STRONG VEININGS, VISIBLE KNOTS AND CRACKS**

Technical specifications of SAPELE Solid Wood Parquet

ESSENTIAL FEATURES	PERFORMANCE	TECHNICAL SPECIFICATION HARMONIZED
Density kg/m ³	650-700	
Reaction to fire	Dfl-S1	UNI EN 14342-2013 EN 13501-1
Thermal conductivity W/Mk	0,16	UNI EN 14342-2013

QUICK INSTALLATION GUIDE

Laying with glue or nailed (only for planks from thickness of 20 mm and above).

It is recommend using solvent-free glues to avoid stains on the surface.

Installation on underfloor heating: suitable (if the conditions of the system allow for it and comply with the regulations).

