


Teak
Teak



Stemau

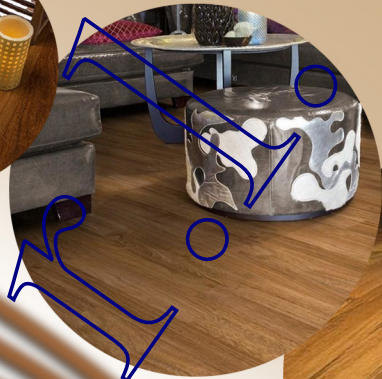

Wood Flooring Production



Wood species: TEAK



Stema S.r.l.
Legal Head Office and Showroom Via Pieve Ligure, 15 00168 Rome
Warehouse and Showroom Via Refrancore, 26 00166 Rome
Factory Via Morsasco, 41 00166 Rome
Phone 0039.06.45.50.22.60 - info@stemausr.it - www.stemausr.it
VAT 01814361000 - Fiscal Code 07578980588

INFORMATION SHEET In compliance with the provisions of the law Legislative Decree no. 206/2005 "Regulations for consumer information"

EUROPEAN STANDARDS: UNI EN 13226 - UNI EN 13227 - UNI EN 13489 - UNI EN 11538

COMMERCIAL NAME: TEAK

BOTANICAL NAME: TECTONA GRANDIS

FAMILY: VERBENACEAE

ORIGIN: SOUTH AMERICA

OXIDATION: MEDIUM

HARDNESS: MEDIUM

DENSITY: FROM 550 TO 750 KG/M³

DRYING: EASY, BUT YOU NEED TO PROCEED SLOWLY

GROWTH AREA: BRASIL

COLOUR: FROM GOLDEN-BRONZE BROWN TO GREENISH-BLACKISH-GREYISH BROWN VARIEGATIONS WITH VERY EVIDENT AND MARKED VEINS TENDING TOWARDS GREY-BLACK

PROPERTY: RESISTANT, DURABLE, WATERPROOF, HIGH-QUALITY WOOD, ALSO SUITABLE FOR OUTDOOR FLOORING

SELECT TEAK



NATURE TEAK



RUSTIC TEAK



- SELECT** ● **UNIFORM TONES, HOMOGENEOUS VEININGS, RANDOM SMALL KNOTS**
NATURE ▲ **SLIGHT CHROMATIC SHADES, ACCENTUATED VEININGS, CONTAINED KNOTS**
RUSTIC ■ **MARKED TONE CHANGES, STRONG VEININGS, VISIBLE KNOTS AND CRACKS**


Technical specifications of TEAK Solid Wood Parquet

ESSENTIAL FEATURES	PERFORMANCE	TECHNICAL SPECIFICATION HARMONIZED
Density kg/m ³	550-750	
Reaction to fire	Dfl-S1	UNI EN 14342-2013 EN 13501-1
Thermal conductivity W/Mk	0,16	UNI EN 14342-2013

QUICK INSTALLATION GUIDE

Laying with glue or nailed (only for planks from thickness of 20 mm and above).
It is recommend using solvent-free glues to avoid stains on the surface.

Installation on underfloor heating: suitable (if the conditions of the system allow for it and comply with the regulations).



Wood Flooring Production

Stema S.r.l.

Legal Head Office and Showroom Via Pieve Ligure, 15 00168 Rome

Warehouse and Showroom Via Refrancore, 26 00166 Rome

Factory Via Morsasco, 41 00166 Rome

Phone 0039.06.45.50.22.60 - info@stemaurl.it - www.stemaurl.it

VAT 01814361000 - Fiscal Code 07578980588

Technical specifications of TEAK 2 or 3 Layers Pre-finished Parquet

ESSENTIAL FEATURES	PERFORMANCE	TECHNICAL SPECIFICATION HARMONIZED
Density kg/m ³	550-750	
Nominal upper layer thickness mm	3/4	
Reaction to fire	Dfl-S1	UNI EN 14342-2013 EN 13501-1
Thermal conductivity W/Mk	0,16	UNI EN 14342-2013

QUICK INSTALLATION GUIDE

2 Layers Laying: with glue or floating (only for planks from width of 120 mm and above).

3 Layers Laying: Floating

It is recommend using solvent-free glues to avoid stains on the surface.

For floating laying, it is recommend using a shock-absorbing or insulating mat.

Installation on underfloor heating: suitable (if the conditions of the system allow for it and comply with the regulations).



Technical specifications of TEAK for outdoor Decking Parquet

ESSENTIAL FEATURES	PERFORMANCE	TECHNICAL SPECIFICATION HARMONIZED
Density kg/m ³	550-750	
Reaction to fire	Dfl-S1	UNI EN 14342-2013 EN 13501-1
Thermal conductivity W/Mk	0,16	UNI EN 14342-2013

QUICK INSTALLATION GUIDE

Installation on aluminum or wooden joists with visible screws for profile **WITHOUT** symmetrical F/F lateral milling or with concealed clips for profile **WITH** symmetrical F/F lateral milling.
(For installation, in case of slopes, it is necessary to use jacks with adjustable support).

