



Stemau S.r.l.  
 Legal Head Office and Showroom Via Pieve Ligure, 15 00168 Rome  
 Warehouse and Showroom Via Refrancore, 26 00166 Rome  
 Factory Via Morsasco, 41 00166 Rome  
 Phone 0039.06.45.50.22.60 - info@stemausrl.it - www.stemausrl.it  
 VAT 01814361000 - Fiscal Code 0778980388

INFORMATION SHEET In compliance with the provisions of the law Legislative Decree no. 206/2005 "Regulations for consumer information"



**TYPE OF FORMAT FOR TRADITIONAL SOLID WOOD PARQUET  
 IDEAL FOR ALL INDOOR ENVIRONMENTS**

**DESCRIPTION:** HANDMADE TILE IN RAW SOLID WOOD (READY FOR LAYING)  
**APPEARANCE CLASSES:** SELECT (CIRCLE) - NATURE (TRIANGLE) - RUSTIC (SQUARE)

**TYPE OF LAYING:** GLUED

**ASSEMBLY INDICATED ON:** DRY AND LEVEL BASE.

**FINISHING AFTER LAYING:** PAINT, OIL, WAX.

**MAINTENANCE:** REMOVE DUST WITH A VACUUM CLEANER AND/OR CLOTH ANTISTATIC. WASH WITH WELL WROUGHT DAMP CLOTH, USING NEUTRAL DETERGENT DILUTED IN WATER.

**FEATURES:** LONG LASTING (CAN BE SMOOTHED EVERY 10-20 YEARS IF RUINED) - EXCELLENT THERMAL AND ACOUSTIC INSULATION - ECOLOGICAL.

**PACKAGE:** 4 PIECES

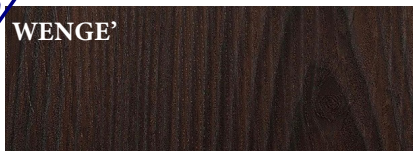
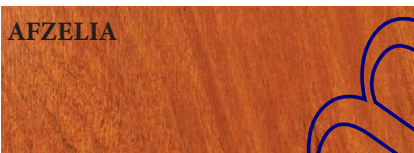
**DIMENSIONS:** THICKNESS 14 mm, WIDTH 500 OR 600 OR 1000 mm, LENGTH 500 OR 600 OR 1000 mm




**EUROPEAN STANDARD:** UNI EN 13227

**MARKING:** CE

**PRODUCTION:** 100% MADE IN ITALY


**MAIN WOOD SPECIES OF ARTISTIC PARQUET**



- SELECT  UNIFORM TONES, HOMOGENEOUS VEININGS, RANDOM SMALL KNURLS
- NATURE  SLIGHT CHROMATIC CONES, ACCENTUATED VEININGS, CONTAINED KNURLS
- RUSTIC  MARKED VARIATION TONES, INTENSE VEININGS, CLEAR KNURLS AND CRACKS



Stemau S.r.l.  
 Legal Head Office and Showroom Via Pieve Ligure, 15 00168 Rome  
 Warehouse and Showroom Via Refrancore, 26 00166 Rome  
 Factory Via Morsasco, 41 00166 Rome  
 Phone 0039.06.45.50.22.60 - [info@stemauri.it](mailto:info@stemauri.it) - [www.stemauri.it](http://www.stemauri.it)  
 VAT 01814361000 - Fiscal Code 0778980388



### Storage

The product must absolutely be stored with intact and closed packaging in covered and dry environments with a controlled temperature between 16°C and 23°C or at an average temperature of 20°C. If the product is stored outside this interval before installation, it is recommended to acclimatise the material for the previous 48 hours in the same environments where it will be installed.

### Laying

It is advisable to let the material, in intact and closed packaging, settle for at least 24 hours in the environment in which it will be installed. Inspect all planks for damage before installation. If you have any doubts regarding the fit or finish of the product or if there is damage due to impacts, tears or abrasions, contact the Company. We do not accept complaints for floors that have been cut and/or laid.

To minimize the variation in shade, open several boxes at the same time, mix and lay the boards, taking care to mix them.

The installation substrate must be consistent, stable, dry, clean and well levelled.

For new or pre-existing screeds, refer to the UNI EN 11371 standard, which defines in detail the properties and performance characteristics of cementitious screeds or screeds based on special binders or based on anhydride (calcium sulphate), intended for installation by gluing parquet and wooden floors.

Cement screeds must be smooth, dry, clean and free from any foreign material such as dust, wax, solvents, paint, grease, oils and old adhesive residues. The surface must be hard and compact and free of dust or flaking.

New concrete must be dry. The maximum humidity level allowed during installation is 65%.

Therefore, avoid subjecting the floor to an environmental climate that is too dry or too humid, in order to avoid deformations, which are absolutely not due to production defects.

It can also be installed on radiant floors, if the system conditions allow for it and comply with the regulations.

### Wood species

Wood is a natural material, therefore differences in color and fiber between the different elements are to be considered typical of the product. Samples or photographic reproductions are intended as indicative and non-binding. The color of wood, once exposed to sunlight, generally tends to darken and become uniform. Some types of wood react clearly to changes in temperature, humidity and sunlight and can undergo the process of oxidation (color change).

Stemau S.r.l. operates and produces with the utmost respect for nature and the environment, using the raw material exclusively from areas and companies authorized for deforestation, in order to maintain and protect, correctly and responsibly, natural communities and forests, according to rigorous environmental standards, social and economic.

### Maintenance

For good maintenance of a wooden floor, observe the following precautions: provide a doormat at the entrance to the home, kept clean to remove dust and abrasive particles from the soles of the shoes; ordinarily remove dust with a mop or vacuum cleaner; regularly clean the floor with a cloth moistened with water and a neutral, non-foamy floor detergent; never wash with boiling water and/or steam producing appliances. For extraordinary maintenance it is recommended to contact expert and qualified personnel.

### Disposal

The flooring can't be dispersed in the environment, but entrusted to public waste disposal systems.

### Warnings

It is absolutely forbidden to use the product as a structural component or in environments different from the ones indicated, change the product, use different ways of lay down respect to the ones indicated, use glues for fixing, use different clean product respect to the ones indicated. The Firm is not responsible for accident or damages as a result of inappropriate use of the products, as well as the even partial non-compliance with safety standards and intervention procedures.

